Atios LumaPort ADE-LP Datasheet

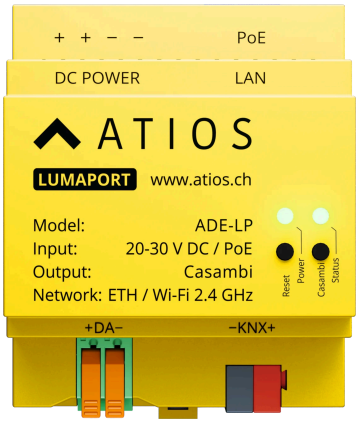

TECHNICAL SPECIFICATIONS

Power supply	Power over Ethernet; or 20-30 V DC
Power consumption	1 W
Casambi integration	Casambi network, connected through the Casambi app
Connected devices	Up to 250 Casambi fixtures and groups
App support	Matter: Apple Home, Google Home, Samsung SmartThings, Amazon Alexa, Home Assistant and more
IP communication	Ethernet 10/100 Base-T and Wi-Fi 2.4 GHz
Dimensions	70 × 85 × 60 mm, 4 modules DIN rail
Enclosure	ABS, weight 85 g
Ambient temperature	−5 °C to +45 °C
Control	2 push buttons (Reset, Casambi)
Indicators	2 multicolor status LEDs (Power, Casambi Status)
Origin and HS code	Made in Switzerland, HS code 8517.62

APPLICATION AREA AND FEATURES

- Matter bridge for Casambi lighting networks.
- Up to 250 Casambi fixtures and groups.
- Power over Ethernet (PoE) or 20-30 V DC.
- Ethernet or Wi-Fi (2.4 GHz) connectivity.
- Matter-compatible: Apple Home, Google Home, Alexa, SmartThings, Home Assistant.